

# FSM2860

## 28-inch Industrial LCD Monitor

### Features

- 16:3 Ultra Widescreen Design for Space Saving
- 1920 x 360 Resolution, High Brightness of 600 nits
- Vandal-Proof 6mm Tempered Glass
- Robust Design with SECC Chassis and IP65 Waterproof Front Bezel



### SPECIFICATION

Display	Size/Panel Type	28" TFT LCD Panel
	Resolution	1920 x 358
	Brightness (cd/m <sup>2</sup> )	700cd/m <sup>2</sup>
	Contrast Ratio	3000:1
	Response Time	6.5ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
	Cover Lens	Vandal-Proof 6mm Tempered Glass
Environment	Surface Hardness	7H
	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
System	Waterproof Rating	IP65 Waterproof Front Bezel
	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI, VGA, DC in
	Power Input	DC12V Input, w/ AC100~240V Power Adapter
	Power Consumption	50W
	Certification	FCC/CE/RoHS Compliance
	Mounting	Ear Mount, w/ Ear Type Mounting Bracket x 2
Dimension/Weight	738mm (W) x 172mm (H) x 70mm (D)/18Kgs	

Specifications subject to change without notice

### ORDERING CODE

FSM2860-XXXX


-LS = Light Sensor, Auto Dimming

-OB = Optical Bonding

### ACCESSORIES

■ VGA Cable x 1 (1.8M)

■ AC/DC Power Adapter 1 (1.8M)

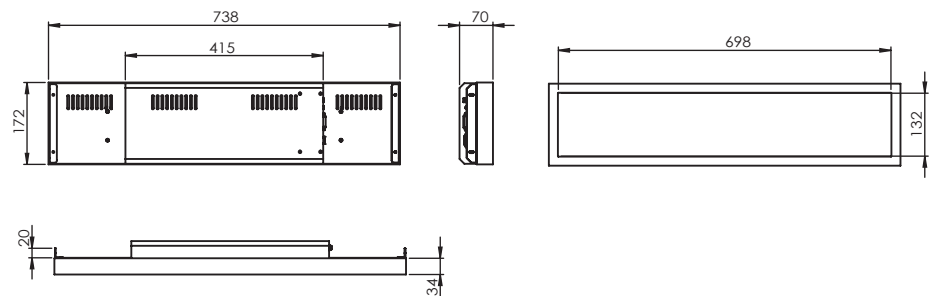

Unit: mm