

# FSM3260-IP66

## 31.5-inch Industrial IP66 Waterproof Stainless Steel LCD Monitor

### Features

- 31.5" TFT LCD Monitor with Resolution up to 1920 x 1080
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 1000nits High Brightness for Sunlight Readable (Optional)
- IR Touch Screen / P-CAP Touch Screen (Optional)



### SPECIFICATION

Display	Size/Panel Type	31.5" TFT LCD Panel
	Resolution	1920 x 1080
	Brightness (cd/m <sup>2</sup> )	500cd/m <sup>2</sup> (Optional: 1000cd/m <sup>2</sup> )
	Contrast Ratio	3000:1
	Response Time	8ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
Touch Screen	Surface Hardness	7H, AR Glass
	Touch Screen Type	IR Touch / P-CAP Touch (Optional)
Environment	Surface Hardness	7H
	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~60°C
	Humidity	5%~95% RH(Non-Condensing)
System	IP Rating	IP66/NEMA4X, 6 Side Waterproof
	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI x 1, VGA x 1, Power in x 1
	Power Input	DC24V Input, w/ AC100~240V Power Adapter
	Power Consumption	45W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 400 x 200mm
	Dimension/Weight	796mm (W) x 498mm (H) x 70.4mm (D)/21kgs

Specifications subject to change without notice


### ORDERING CODE

FSM3260-IP66-XXXX

- PCT = P-CAP Touch Screen
- IR = IR Touch Screen
- HB1000 = 1000nits High Brightness
- W = Wide Temperature, -30°~+60°C
- LS = Light Sensor, Auto Dimming
- OB = Optical Bonding

### ACCESSORIES

- DVI Cable x 1 (1.8M)
- VGA Cable x 1 (1.8M)
- AC/DC Power Adapter 1 (1.8M)

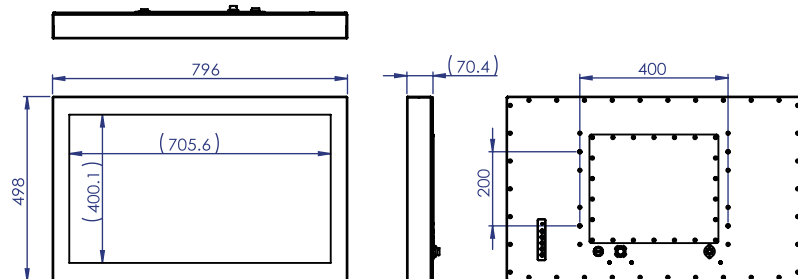

Unit: mm