

FSM2460-IP66

24-inch Industrial IP66 Waterproof Stainless Steel LCD Monitor

Features

- 24" TFT LCD with resolution up to 1920 x 1080
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- Resistive Touch Screen / P-CAP Touch Screen (Optional)



SPECIFICATION

Display	Size/Panel Type	24" TFT LCD Panel
	Resolution	1920 x 1080
	Brightness (cd/m ²)	300cd/m ² (1000cd/m ² Optional)
	Contrast Ratio	5000:1
	Response Time	25ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
	Surface Hardness	7H, AR Glass
Touch Screen	Touch Screen Type	Resistive Touch / P-CAP Touch(Optional)
	Surface Hardness	3H / 7H
Environment	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 side Waterproof
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI x 1, VGA x 1, Power in x 1
	Power Input	DC12V Input, w/ AC100~240V Power Adapter
	Power Consumption	35W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 100 x 100mm; 200 x 100mm
	Dimension/Weight	608mm (W) x 392mm (H) x 54mm (D)/12kgs

Specifications subject to change without notice


ORDERING CODE

FSM2460-IP66-XXXX

- PCT = P-CAP Touch Screen
- RT = Resistive Touch Screen
- HB1000 = 1000nits High Brightness
- W = Wide Temperature, -30°~+60°C
- LS = Light Sensor, Auto Dimming
- OB = Optical Bonding

ACCESSORIES

- DVI Cable x 1 (1.8M)
- VGA Cable x 1 (1.8M)
- AC/DC Power Adapter x 1 (1.8M)

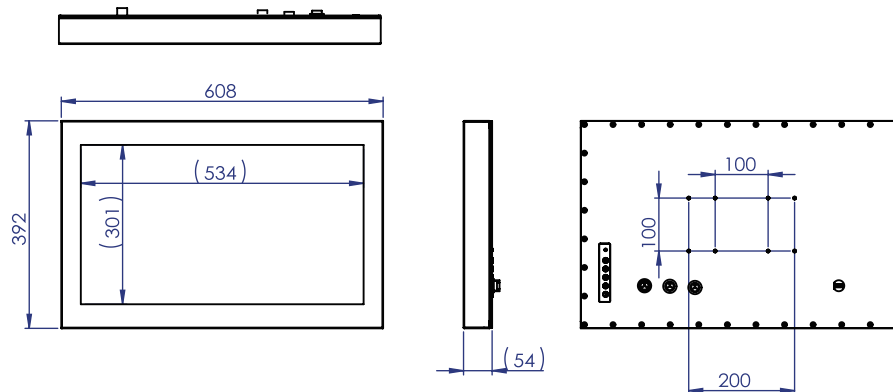

Unit:mm