

FSO1700

17-inch Open Frame Industrial LCD Monitor

Features

- 17" Open Frame Monitor
- 1000nits High Brightness for Sunlight Readable (Optional)
- P-CAP Touch Screen / Resistive Touch Screen (Optional)



SPECIFICATION

Display	Size/Panel Type	17" TFT LCD Panel
	Resolution	1280 x 1024
	Brightness (cd/m ²)	350cd/m ² (Optional: 1000cd/m ²)
	Contrast Ratio	1000:1
	Response Time	5 ms
	Backlight	LED Backlight Unit
	Colors	16.2M Colors
	Viewing Angle (H/V)	170°/160°
Touch Screen	Touch Screen Type	P-CAP Touch / Resistive Touch (Optional)
	Surface Hardness	7H / 3H
Environment	Operating Temperature	0°~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	VGA, DVI, HDMI, DC in w/ 2 PIN Terminal Block
	Power Input	DC12V input, w/ AC100~240V Power Adapter
	Power Consumption	32W
	Mounting	Open Frame Mounting Brackets
	Certification	FCC/CE/RoHS Compliance
	Dimension/Weight	378.1mm (W) x 306.5mm (H) x 45.6mm (D)/3.5kg

Specifications subject to change without notice


ORDERING CODE

FSO1700-XXXX

- PCT = P-CAP Touch Screen
- RT = Resistive Touch Screen
- HB1000 = 1000nits High Brightness
- W = Wide Temperature, -20°~+50°C
- LS = Light Sensor, Auto Dimming
- OB = Optical Bonding

ACCESSORIES

- VGA Cable x 1
- AC/DC Power Adapter x 1

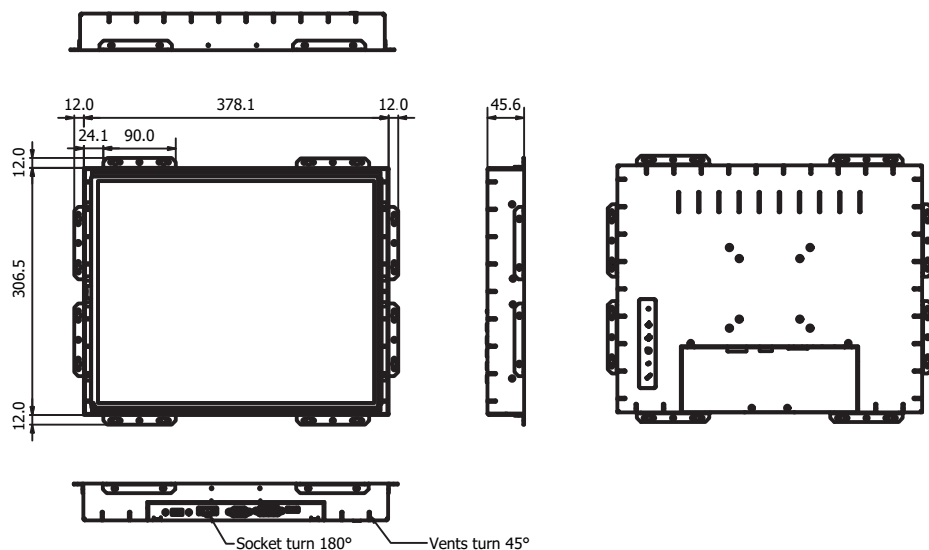

Unit: mm