

FSM1261-6G

12.1-inch Industrial IP66 Waterproof Stainless Steel LCD Monitor

Features

- 12.1" TFT LCD Monitor with Resolution up to 1024 x 768
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 1000nits High Brightness for Sunlight Readable (Optional)
- Resistive Touch Screen (Optional) / P-CAP Touch (Optional)
- Wide Temperature Support -30°~+60°C (Optional)



SPECIFICATION

Display	Size/Panel Type	12.1 TFT LCD Panel
	Resolution	1024 x 768
	Brightness (cd/m ²)	500cd/m ² (Optional: 1000cd/m ²)
	Contrast Ratio	700:1
	Response Time	35ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	160°/140°
Cover Lens	Surface Hardness	7H, AR Glass
Touch Screen (Optional)	Touch Screen Type	Resistive Touch / P-CAP Touch (Optional)
	Surface Hardness	3H / 7H
Environment	Operating Temperature	0°~+50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~90% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI x 1, VGA x 1, Power in x 1
	Power Input	12V DC Input, w/ AC100~240V Power Adapter
	Power Consumption	20W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 75 x 75mm;100 x 100mm
	Dimension/Weight	347mm (W) x 292mm (H) x 64mm (D)/6.3kgs

Specifications subject to change without notice

ORDERING CODE

FSM1261-6X-XXXX

G = AR/AG/Tempered Glass

P = P-CAP Touch Screen

R = Resistive Touch Screen

-HB10 = 1000nits High Brightness


-W = Wide Temperature, -30°~+60°C

ACCESSORIES

■ DVI Cable x 1 (5M)

■ VGA Cable x 1 (5M)

■ AC/DC Power Adapter x 1 (5M)

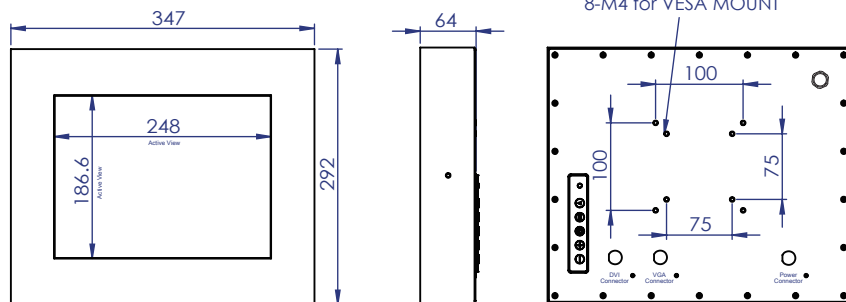

Unit: mm