

FSM1502-5R-PM

15-inch Industrial LCD Monitor

Features

- 15" TFT LCD with Resolution up to 1024 x 768
- 1000nits/1500nits High Brightness for Sunlight Readable (Optional)
- IP65 Waterproof Front Bezel



SPECIFICATION

Display	Size/Panel Type	15" TFT LCD Panel
	Resolution	1024 x 768
	Brightness (cd/m ²)	450cd/m ² (Optional: 1000cd/m ² / 1500cd/m ²)
	Contrast Ratio	800:1
	Response Time	8ms
	Backlight	LED Backlight Unit
	Colors	16.2M Colors
	Viewing Angle (H/V)	160°/150°
Touch Screen	Touch Screen Type	Resistive Touch
	Surface Hardness	3H
Environment	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	10%~90% RH(Non-Condensing)
	Waterproof Rating	IP65 Waterproof Front Bezel
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI, HDMI, VGA, DC in, USB (for Touch)
	Power Input	DC12V Input, w/ AC100~240V Power Adapter
	Power Consumption	25W
	Certification	FCC/CE/RoHS Compliance
	Mounting	Panel / VESA 75 x 75mm, 100 x 100mm
	Dimension/Weight	400mm (W) x 320mm (H) x 41mm (D) /5.3kgs

Specifications subject to change without notice


ORDERING CODE

FSM1502-5R-XXXX

- HB10 = 1000nits High Brightness
- HB15 = 1500nits High Brightness
- PM = Panel Mount
- W = Wide Temperature, -30°~+60°C

ACCESSORIES

- VGA Cable x 1 (1.8M)
- AC/DC Power Adapter x 1 (1.8M)

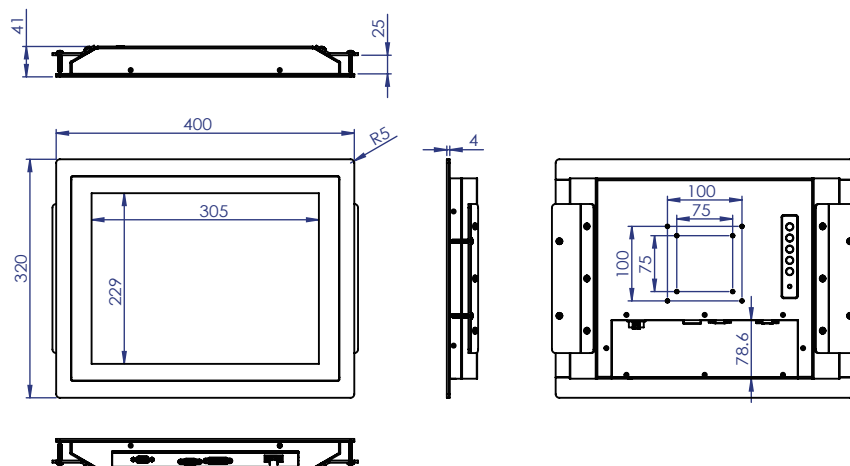

Unit: mm