

FSM5560-6G

55-inch Industrial IP66 Waterproof Stainless Steel LCD Monitor

Features

- 55" TFT LCD Monitor with Resolution up to 3840x2160
- IP66/NEMA4X Waterproof, Stainless Steel Housing
- 2500nits High Brightness for Sunlight Readable (Optional)
Surface Liquid Crystal Support Wide Temperature -20~+110°C
- Wide Temperature Support -20°~+50°C (Optional)



SPECIFICATION

Display	Size/Panel Type	55" TFT LCD Panel
	Resolution	3840x2160
	Brightness (cd/m ²)	500cd/m ² (Optional: 2500cd/m ² , 1920x1080)
	Contrast Ratio	4000:1
	Response Time	6.5ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178
Cover Lens	Cover Lens Type	Tempered Glass (Optional: PCAP Touch/IR Touch)
	Surface Hardness	7H
Environment	Operating Temperature	0°~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	10%~90% RH(Non-Condensing)
	Waterproof Rating	IP66/NEMA4X, 6 Side Waterproof
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	HDMI x 1, Power in x 1
	Power Input	AC100~240V Input
	Power Consumption	140W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA 600 x 600
	Dimension/Weight	1352.6mm (W) x 823.6mm (H) x 110mm (D)/62kgs

Specifications subject to change without notice

ORDERING CODE

FSM5560-6X-XXXX

G = Tempered Glass

P = P-CAP Touch Screen

I = IR Touch Screen


-HB25 = 2500nits High Brightness

-W = Wide Temperature, -20°~+50°C

ACCESSORIES

■ HDMI Cable x 1 (1.8M)

■ Power Cable x 1 (5M)

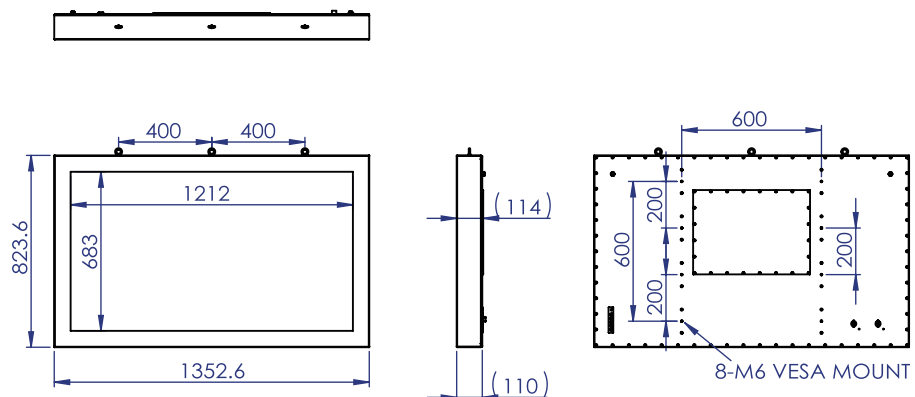

Unit:mm