

FSO3200

32-inch Open Frame Industrial LCD Monitor

Features

- 32" TFT LCD with Resolution 1920 x 1080
- 1500/2500nits High Brightness for Sunlight Readable (Optional)
- IR Touch Screen / P-CAP Touch Screen (Optional)



SPECIFICATION

Display	Size/Panel Type	32" TFT LCD Panel
	Resolution	1920 x 1080
	Brightness (cd/m ²)	500cd/m ² (Option: 1500/2500cd/m ²)
	Contrast Ratio	3000:1
	Response Time	8 ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
	Touch Screen Type	IR Touch / P-CAP Touch (Option)
Touch Screen (Option)	Surface Hardness	7H
	Operating Temperature	0°~50°C
Environment	Storage Temperature	-20°C~+60°C
	Humidity	10%~90% RH(Non-Condensing)
	OSD	Menu, Auto, On/Off, Up, Down
System	I/O Interface	VGA, DVI, HDMI, DC in w/ 2 PIN Terminal Block
	Power Input	DC24V input, w/ AC100~240V Power Adapter
	Power Consumption	55W
	Mounting	Open Frame Mounting Brackets
	Certification	FCC/CE/RoHS Compliance
	Dimension/Weight	770.4mm (W) x 512.9mm (H) x 60.3mm (D)/20kg

Specifications subject to change without notice


ORDERING CODE

FSO3200-XXXX

- P = P-CAP Touch Screen
- I = IR Touch Screen
- H15 = 1500nits High Brightness
- H25 = 2500nits High Brightness
- H = Wide Temperature, -20°~+50°C

ACCESSORIES

- VGA Cable x 1
- AC/DC Power Adapter x 1

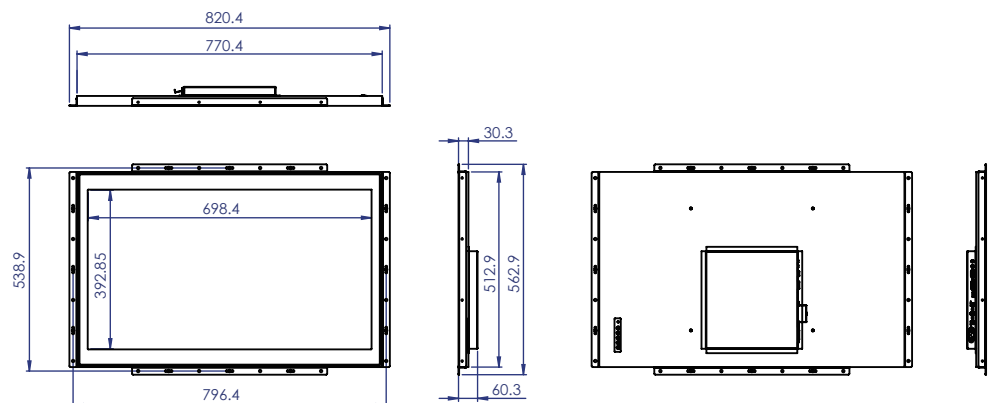

Unit: mm