

F504200

42.5" OPEN FRAME INDUSTRIAL LCD MONITOR

FEATURES

- 42.5" Industrial Grade LCD Panel
- Resolution up to 1920 x 1080
- Mounting Brackets Design for Easy Installation
- 1500nits/2500nits High Brightness for Sunlight Readable (Option)
- Wide Temperature Support -30 to 60°C (Option)




SPECIFICATION

| | | |
|-------------|-----------------------|---|
| Display | Size / Panel Type | 42.5" TFT LCD Panel |
| | Resolution | 1920 x 1080 |
| | Brightness | 500 cd/m ² (Option : 1500 / 2500 cd/m ²) |
| | Contrast Ratio | 4000 : 1 |
| | Response Time | 8 ms |
| | Backlight | LED Backlight Unit |
| | Colors | 16.7M Colors |
| | Viewing Angle | 178° / 178° |
| | Surface Hardness | 3H, Anti-Glare |
| Cover Lens | Cover Lens Type | N/A |
| | Option | Protection Glass / PCAP Touch |
| Environment | Operating Temperature | 0°~+50°C |
| | Storage Temperature | -20°~+60°C |
| | Humidity | 10%~90% RH (Non-Condensing) |
| System | OSD | Menu , Auto , On/Off , Up , Down |
| | I/O Interface | VGA x 1, DVI x 1, HDMI x 1, AC Inlet x 1 |
| | Power Input | AC100~240V Input |
| | Power Consumption | 70W |
| | Compliance | FCC/CE/RoHS Compliance |
| | Mounting | 4 Side Mounting Brackets |
| | Dimension / Weight | 1001mm (W) x 640mm (H) x 62.5mm (D) / 22kgs |

Specifications subject to change without notice

ACCESSORIES

- VGA Cable x 1
- Power Cord x 1

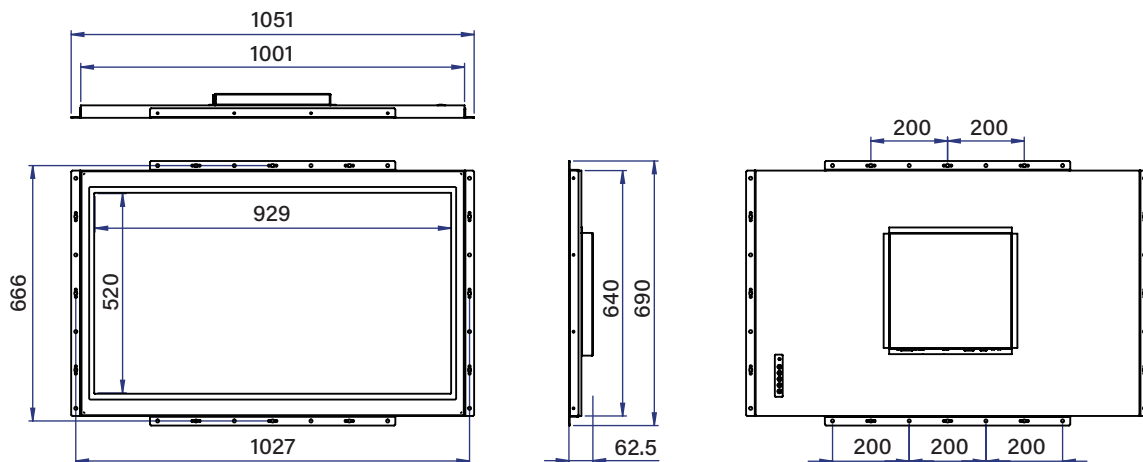

Unit: mm