

FSO2200

21.5-inch Industrial Open Frame LCD Monitor

Features

- 21.5" HD1080 TFT LCD with Resolution up to 1920 x 1080
- Open Frame WideScreen LCD Monitor
- 1000nit High Brightness for Sunlight Readable (Optional)
- Resistive Touch Screen / P-CAP Touch Screen (Optional)



SPECIFICATION

Display	Size/Panel Type	21.5" TFT LCD Panel
	Resolution	1920 x 1080
	Brightness (cd/m ²)	350cd/m ² (Optional: 1000cd/m ²)
	Contrast Ratio	3000:1
	Response Time	25ms
	Backlight	LED Backlight Unit
	Colors	16.7M Colors
	Viewing Angle (H/V)	178°/178°
Touch Screen	Touch Screen Type	Resistive Touch / P-CAP Touch (Optional)
	Surface Hardness	3H / 7H
Environment	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~+60°C
	Humidity	5%~95% RH(Non-Condensing)
System	OSD	Menu, Auto, On/Off, Up, Down
	I/O Interface	DVI, VGA, HDMI, Power in x 1
	Power Input	AC100~240V Power Adapter
	Power Consumption	25W
	Certification	FCC/CE/RoHS Compliance
	Mounting	VESA Mount 100 x 100mm
	Dimension/Weight	557.2mm (W) x 327.8mm (H) x 30mm (D) / 5kgs

Specifications subject to change without notice


ORDERING CODE

FSO2200-XXXX

- PCT = P-CAP Touch Screen
- RT = Resistive Touch Screen
- HB1000 = 1000nits High Brightness
- W = Wide Temperature, -30°~+60°C
- LS = Light Sensor, Auto Dimming
- OB = Optical Bonding

ACCESSORIES

- VGA Cable x 1
- AC/DC Power Adapter x 1

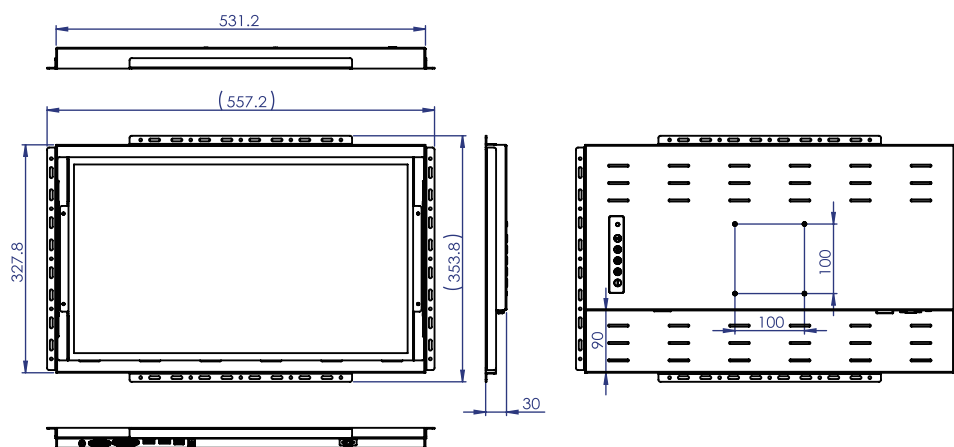

Unit:mm