

FSP1502-5P-PM-8145UE

15" INDUSTRIAL PANEL PC

FEATURES

- 15" TFT LCD Panel PC with Resolution up to 1024 x 768
- IP65 Front Bezel Waterproof
- Built-in Intel Core i3-8145UE Processor
- True Flat PCAP Touch Screen
- 1000nits/1600nits High Brightness for Sunlight Readable (Option)




SPECIFICATION

| | | |
|--------------------|---|---|
| Display | Size / Panel Type | 15" TFT LCD Panel |
| | Resolution | 1024 x 768 |
| | Brightness | 500 cd/m ² (Option : 1000 / 1600 cd/m ²) |
| | Contrast Ratio | 1000 : 1 |
| | Response Time | 25 ms |
| | Backlight | LED Backlight Unit |
| | Colors | 16.2M Colors |
| | Viewing Angle | 178° / 178° |
| Touch Screen | Touch Screen Type | PCAP Touch Screen |
| | Surface Hardness | 7H |
| Environment | Operating Temperature | 0°~+50°C |
| | Storage Temperature | -20°~+60°C |
| | Humidity | 10%~90% RH (Non-Condensing) |
| | Waterproof Rating | IP65 Front Bezel Waterproof |
| System | Processor | Intel Core i3-8145UE |
| | Memory (Option) | 1 x DDR4 260-pin SO-DIMM 2400MHz, Up to 32GB |
| | Storage (Option) | 1 x M.2 M-Key 2242 (SATA) SSD |
| | I/O Interface | USB3.0 x 4, LAN x 4, HDMI x 1, DisplayPort x 1, DC in w/2pin Terminal Block |
| | Power Input | 12~24VDC Input w/AC100~240V Power Adapter |
| | Power Consumption | 45W |
| | Mounting | Panel Mount / VESA 100 x 100 mm |
| Dimension / Weight | 398mm (W) x 322mm (H) x 72mm (D)/6.7kgs | |

Specifications subject to change without notice

ACCESSORIES

- AC/DC Power Adapter x 1

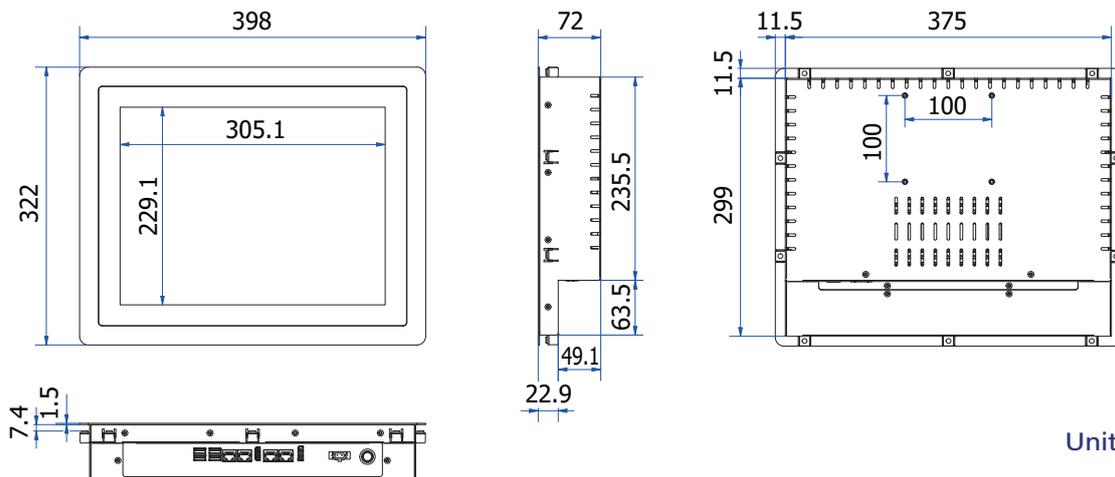

Unit: mm